


QuickWood System

Compact Machine for Finishing and Sealer Sanding

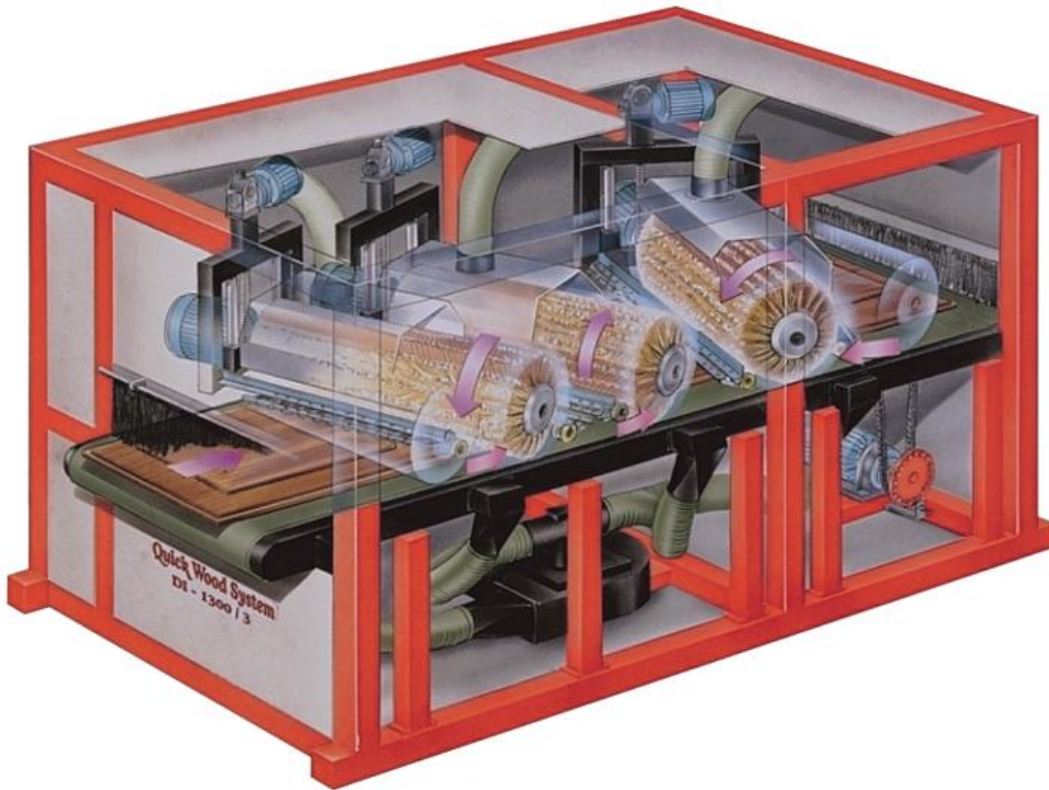


Model DI-1300/3

- **Finishing and sealer sanding** with Quick Discs
- **Wax treatment** with Quick-Flex or QN sisal/leather
- **Oil treatment** with Quick-Flex
- **Structuring** with QN Tynex or QN steel brushes
- **Cleaning** of foiled items with QN sisal/leather


Modular machine with independently adjustable spindles.

- Working width 1300 mm.
- 1, 2 or more spindles, independently adjustable in angle.
- Careful breaking of edges also on the front side and a better treatment of corners of cross profiles.
- Structuring and finishing in one operation.
- Infinitely variable adjustment of spindle rpm through inverter (350-1150 rpm).
- Infinitely variable adjustment of height 0-100 mm for each extra spindle.
- Continuous conveyor belt (also available with vacuum belt).
- Feed speed 2-12 m/min.
- Flexible pressure rollers direct before and after each spindle, also for small pieces.
- The individual pressure rollers stay in line, also with inclined spindles.
- Removable spindles for easy tool shift.
- Prepared for all QuickWood sanding tools.

QuickWood



Technical Specifications

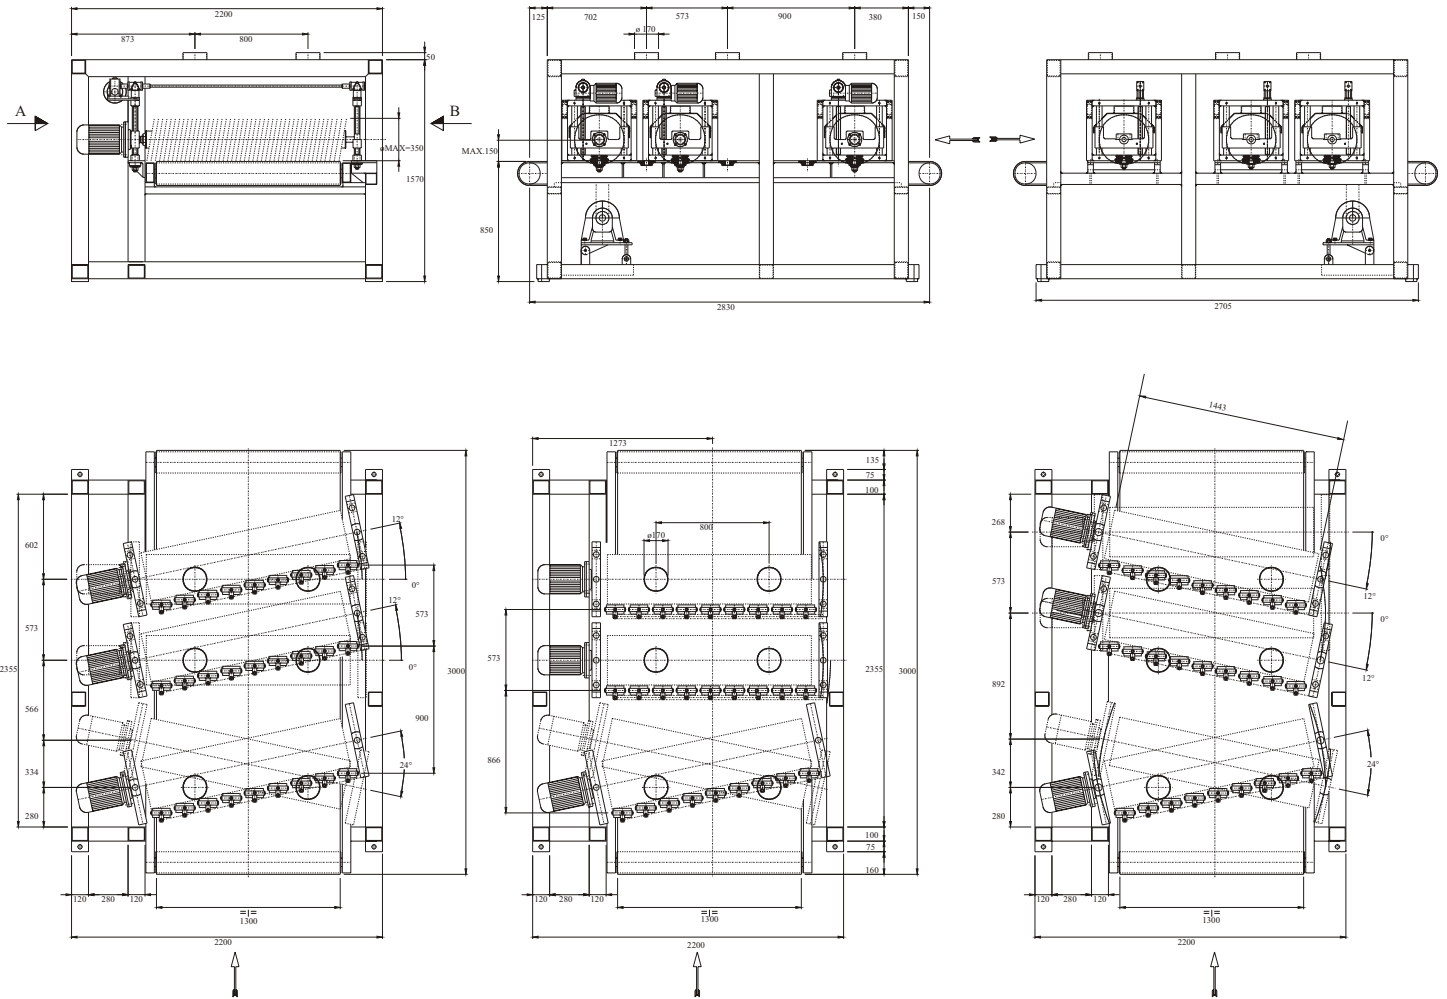

Model DI-1300/3

Dimensions of workpiece:

Height max., mm	100
Width max., mm	1300
Length	infinite

Throughfeed speed, m/min.

Throughfeed speed, m/min.	2-12
---------------------------	------

Spindle speed, rpm

Spindle speed, rpm	350-1150
--------------------	----------

Spindle length, mm

Spindle length, mm	1450
--------------------	------

Number of spindles

Number of spindles	3
--------------------	---

Diameter of tool max., mm

Diameter of tool max., mm	350
---------------------------	-----

Total number of Quick Discs

Total number of Quick Discs	480
-----------------------------	-----

Main motor, kW

Main motor, kW	3 x 2,2
----------------	---------

Inverter spindles, kW

Inverter spindles, kW	3 x 2,2
-----------------------	---------

Conveyor motor, kW

Conveyor motor, kW	1,1
--------------------	-----

Height adjustment, kW

Height adjustment, kW	3 x 0,45
-----------------------	----------

Exhaust ducts, mm

Exhaust ducts, mm	6 x 140
-------------------	---------

Exhaust volume, m³/h

Exhaust volume, m ³ /h	7900
-----------------------------------	------

Net weight, kg

Net weight, kg	ca. 1800
----------------	----------

Dimensions, mm (L x W x H)

Dimensions, mm (L x W x H)	3000 x 2200 x 1570
----------------------------	--------------------

QuickWood

QuickWood Vertrieb GmbH

Brunnenstraße 61
89520 Heidenheim-Aufhausen

+49 (0) 7321 96188-0
FAX +49 (0) 7321 940950



qw@quickwood.de
http://www.quickwood.de