

For laminated shapes 2 or 4 sides in one pass


Model QT2 QT4



Model QT2 has 2 vertical spindles 300 mm high as standard. As sanding tool we recommend Quick Flex.

The distance between the spindles can be adjusted for different thickness of material and different diameters of sanding drums. To adapt to very small radii the spindles can be mounted with Quick Flex \varnothing 150 mm as minimum and up to \varnothing 350 mm.

Model QT2 is available with a feed drive, also adjustable to accommodate to the different diameters.

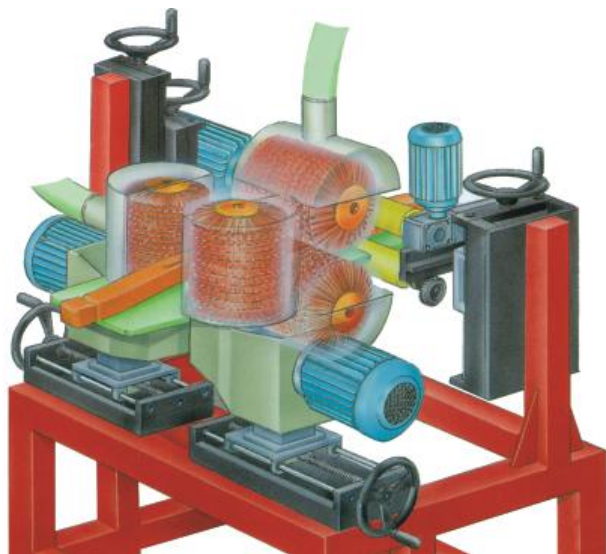

Model QT4 is as QT2 but with two horizontal sanding drums also equipped with Quick Flex. The lower sanding drums are fixed in the table and the upper ones are adjustable up and down.

Technical Specifications

	Model QT2	Model QT4
Main motors, kW	2 x 0,55	2 x 0,55
Revolutions per min.	200-1100	200-1100
Horizontal drums, kW	-	2 x 0,37
Horizontal drums rpm	-	900
Length of spindle, mm	300	300
Adjustable in width, mm	200	200
Adjustable in height, mm	-	300
Feed drive, kW	2 x 0,25	2 x 0,25
Feed speed, m/min.	5	5