


# QuickWood System

## Compact Single Head Finishing Sander

Model RO 800/1  
RO 1300/1

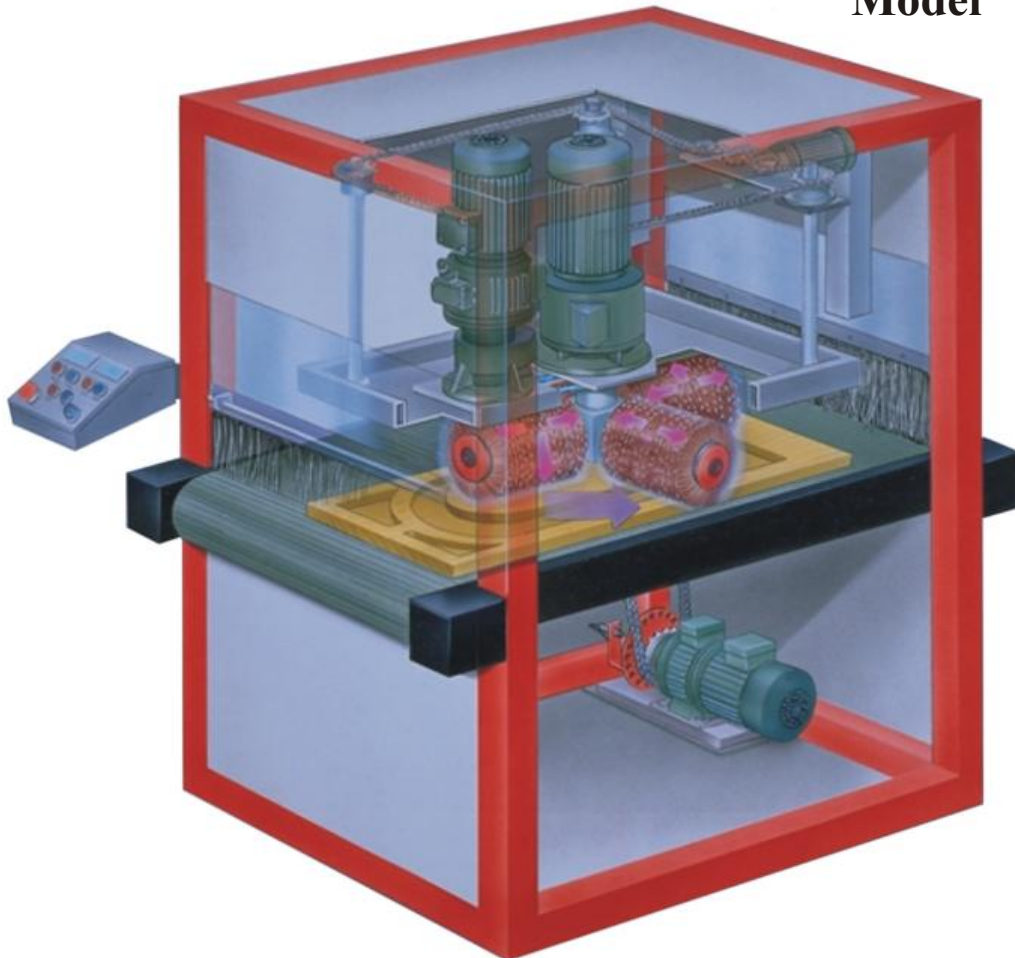

### Compact Finishing Sander at a Compact Price

- Sanding of raw wood - white wood - sealer - structure brushing.
- Hexagonal shafts for direct power transfer.
- Removable shafts for quicker tool change.
- Oscillating tools as Quick-Discs - QN + QD.
- Prepared for all QuickWood's sanding tools.
- For finish sanding of louver - shutters - raised panel doors - frames.
- For sanding/finishing of Hard wood - Softwood - MDF - Veneer - Plywood.
- All speeds adjustable.
- Conveyor belt as wide - wide with vacuum - dual adjustable.
- Electric adjustment of dual belt width and height as option.


**QuickWood**



# Technical Specifications



- Oscillating Quick Discs for white wood and sealer sanding.
- Oscillating brush system model QN. Can be combined with Quick Discs for a second to none sealer sanding. Or for brushing - oil and wax - structuring.
- Quick-Flex for wood sanding, finishing and sealer sanding. Is delivered in 3 different brush lengths, and 9 different diametres. Also for oil and wax.

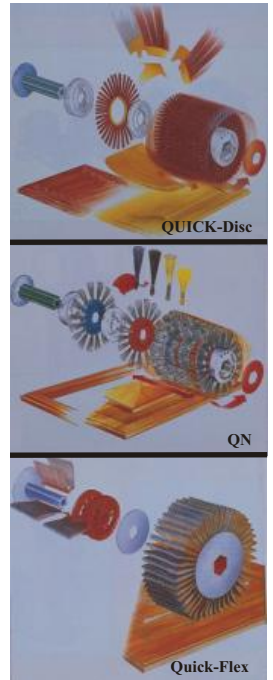

Modell RO /1	800	1300
<b>Dimension of workpiece:</b>		
Height max., mm	100	100
Width max., mm	760	1250
Length	infinite	infinite
Troughfeed, m/min.	2 - 12	2 - 12
Rotation speed, RPM	2 - 12	2 - 12
Spindle speed, RPM	350-1150	350-1150
Spindle length, mm	290	500
Number of spindles	4	4
Diameter of tools max., mm	350	350
Number of Quick-Discs/QN + QD	100/48	168/84
Main motor, kW	1,84	3
Rotation motor, kW	0,37	0,75
Conveyor motor for dual belt, kW	0,37	0,75
Vacuum pump for RO /1Vac., kW	4	7,5
Dust collection duct, Ø mm	2 x 120	4 x 140
Exhaust capacity, cubm/h	2000	5500
Dimensions, mm (LxWxH)	1650 x 1115 x 1800	2190 x 1715 x 2000
Net weight, kg	appr. 800	appr. 1400

# QuickWood



**Sand-Tech Inc**  
805 Marathon Pkwy. Suite 110  
Lawrenceville, GA 30045

Phone:(770) 682-8863 • Fax:(770) 682-3960  
email: quickwood@msn.com • Homepage: www.quickwood.com